


GUND (Geoid Undulation) =
The height of the Geoid (MSL) above the
Reference Ellipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL	181 (116)
HEIGHTS IN FEET ABOVE AD	

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
APRON / RWY / TWY	SURFACE	BEARING STRENGTH	ELEVATION
RWY 12/30	Concrete/Asphalt	90/R/C/W/T	-
RWY 02/20	Asphalt	60/F/C/X/U	-
Aprons A & B	Concrete/Asphalt	100/R/C/W/T	30 ft amsl
Aprons C, F & H	Concrete/Asphalt	50/R/A/X/U	-
Aprons G	Concrete/Asphalt	30/R/B/X/U	-
TWYs R & J	Concrete/Asphalt	65/R/C/W/T	-
TWY S	Asphalt	60/F/B/X/U	-

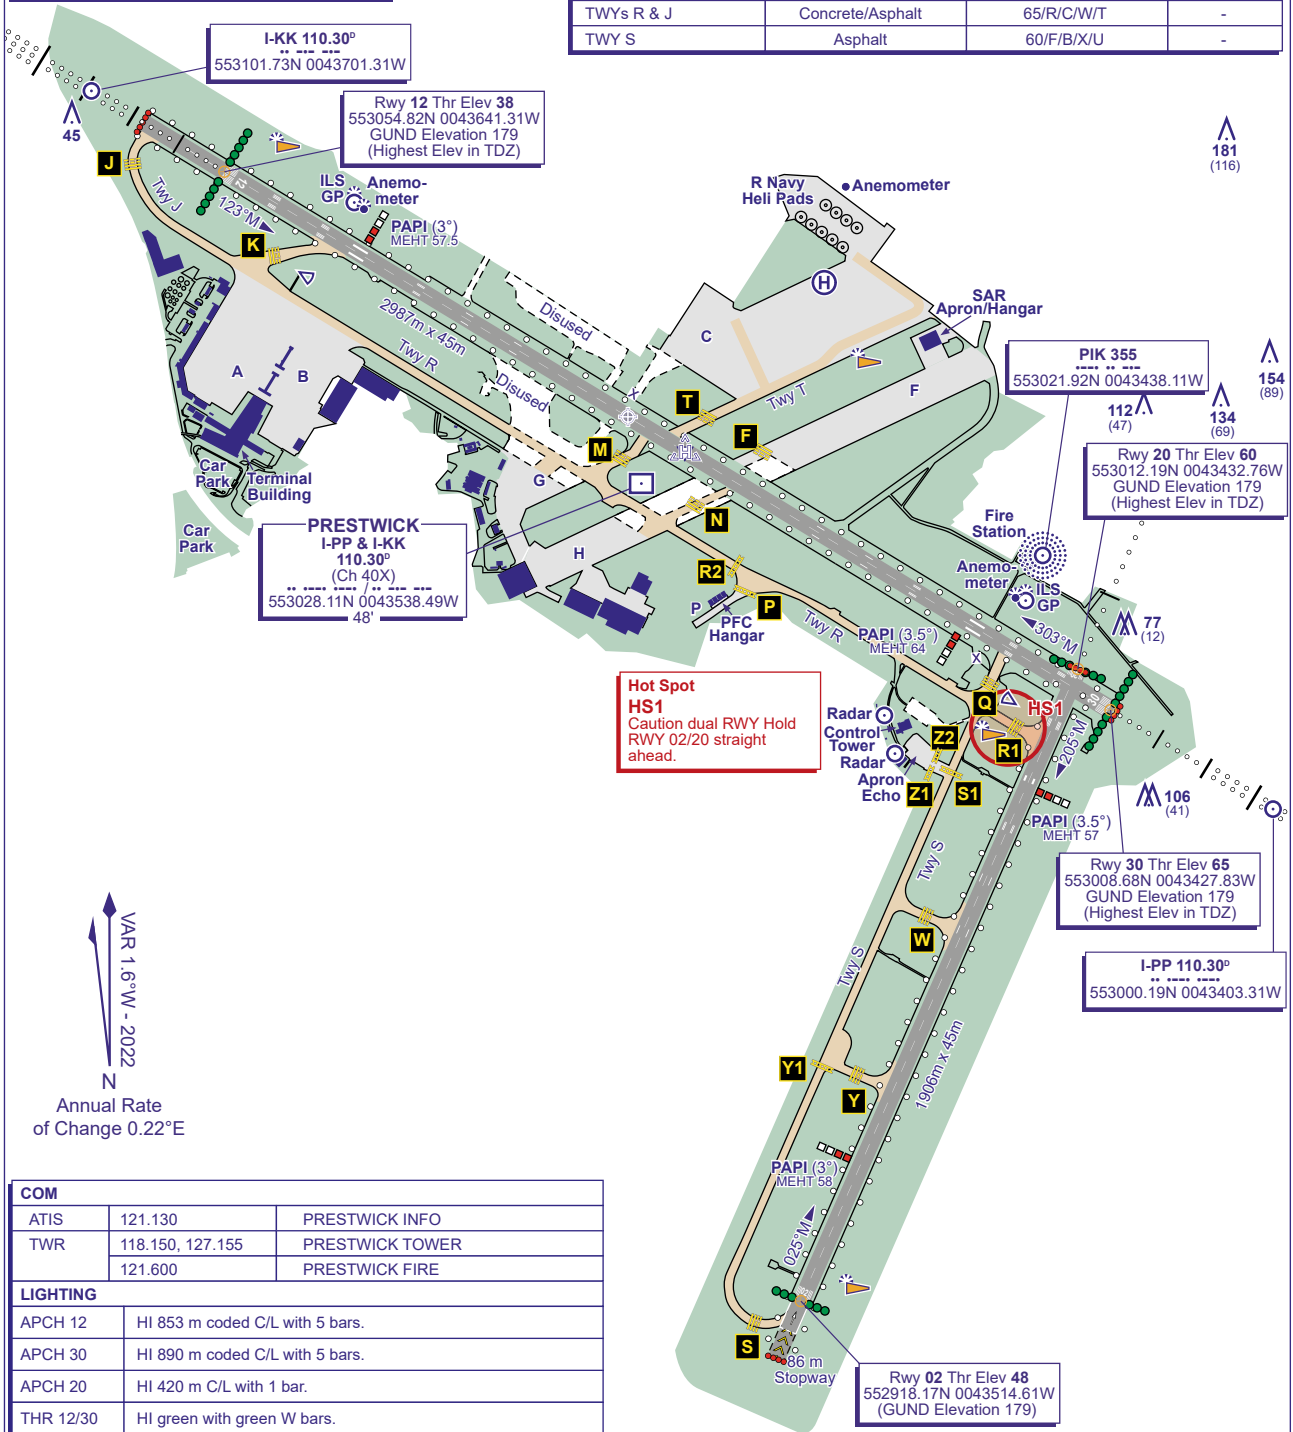

COM		
ATIS	121.130	PRESTWICK INFO
TWR	118.150, 127.155	PRESTWICK TOWER
	121.600	PRESTWICK FIRE
LIGHTING		
APCH 12	HI 853 m coded C/L with 5 bars.	
APCH 30	HI 890 m coded C/L with 5 bars.	
APCH 20	HI 420 m C/L with 1 bar.	
THR 12/30	HI green with green W bars.	
THR 02/20	HI green with green W bars.	
RWY 12/30	HI elev bi-d with LI omni-d component. HI colour coded C/L End lights red.	
RWY 02/20	HI bi-d. LI omni-d component. End lights red.	
TWY	Green C/L. Blue edge. Guard Lights at J, K, Q, R1, S, W & Y.	

CHANGE (4/25): OBSTACLE 134FT MODIFIED.