
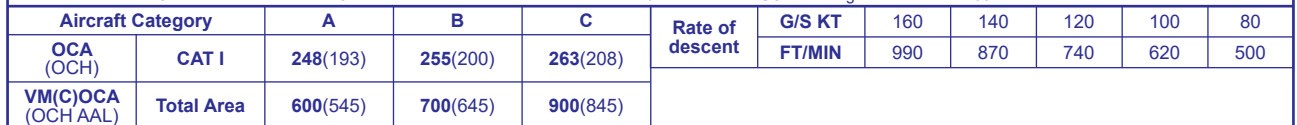


**SOUTHEND**  
**ILS/DME/NDB(L)**  
**RWY 05**  
(ACFT CAT A,B,C)



**NOTES**

- 1 Aircraft will normally be required to hold not lower than **2500**. Lowest altitude to commence procedure from **NDB(L) SND** following Missed Approach is **2000**.
- 2 Maximum 185KIAS for hold and 165KIAS base turns.
- 3 Do not exceed I-SO D10.3 to remain within controlled airspace.

CHANGE (2/26): MAG VAR. MAG TRACKS. EGR162 ADDED.