



COM		
ATIS	127.480	GLOUCESTER INFO
TWR	122.905	GLOUCESTER TOWER
	121.605	GLOUCESTER FIRE
LIGHTING		
APCH 09	HI 230 m basic C/L with 1 bar.	
APCH 27	HI 312 m intermediate C/L with 2 bars.	
THR 09/27	HI green W bars.	
RWY 09/27	HI elev bi-d edge. End lights red.	
TWY	TWY A green C/L. Blue edge on all south side runway intersections and hold A2/A3 area. Guard lights at A1, A2, A3, C1, D1, E2 & G1.	

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.	
BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	
ELEVATIONS IN FEET AMSL	135
HEIGHTS IN FEET ABOVE AD	(34)



RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
RWY / TWY / APRON	SURFACE	PCN	PCR
RWY 04/22	Asphalt	-	-
RWY 09/27	Grooved Asphalt	20/F/C/X/T	-
Main Apron (A)	Asphalt	16/F/B/W/U	-
Maintenance Apron (B)	Asphalt	-	-
Tower Apron (C)	Asphalt	-	-
TWY A	Asphalt	16/F/B/W/U	-
TWY B,C,D,E,G,H,J,K	Asphalt	-	-

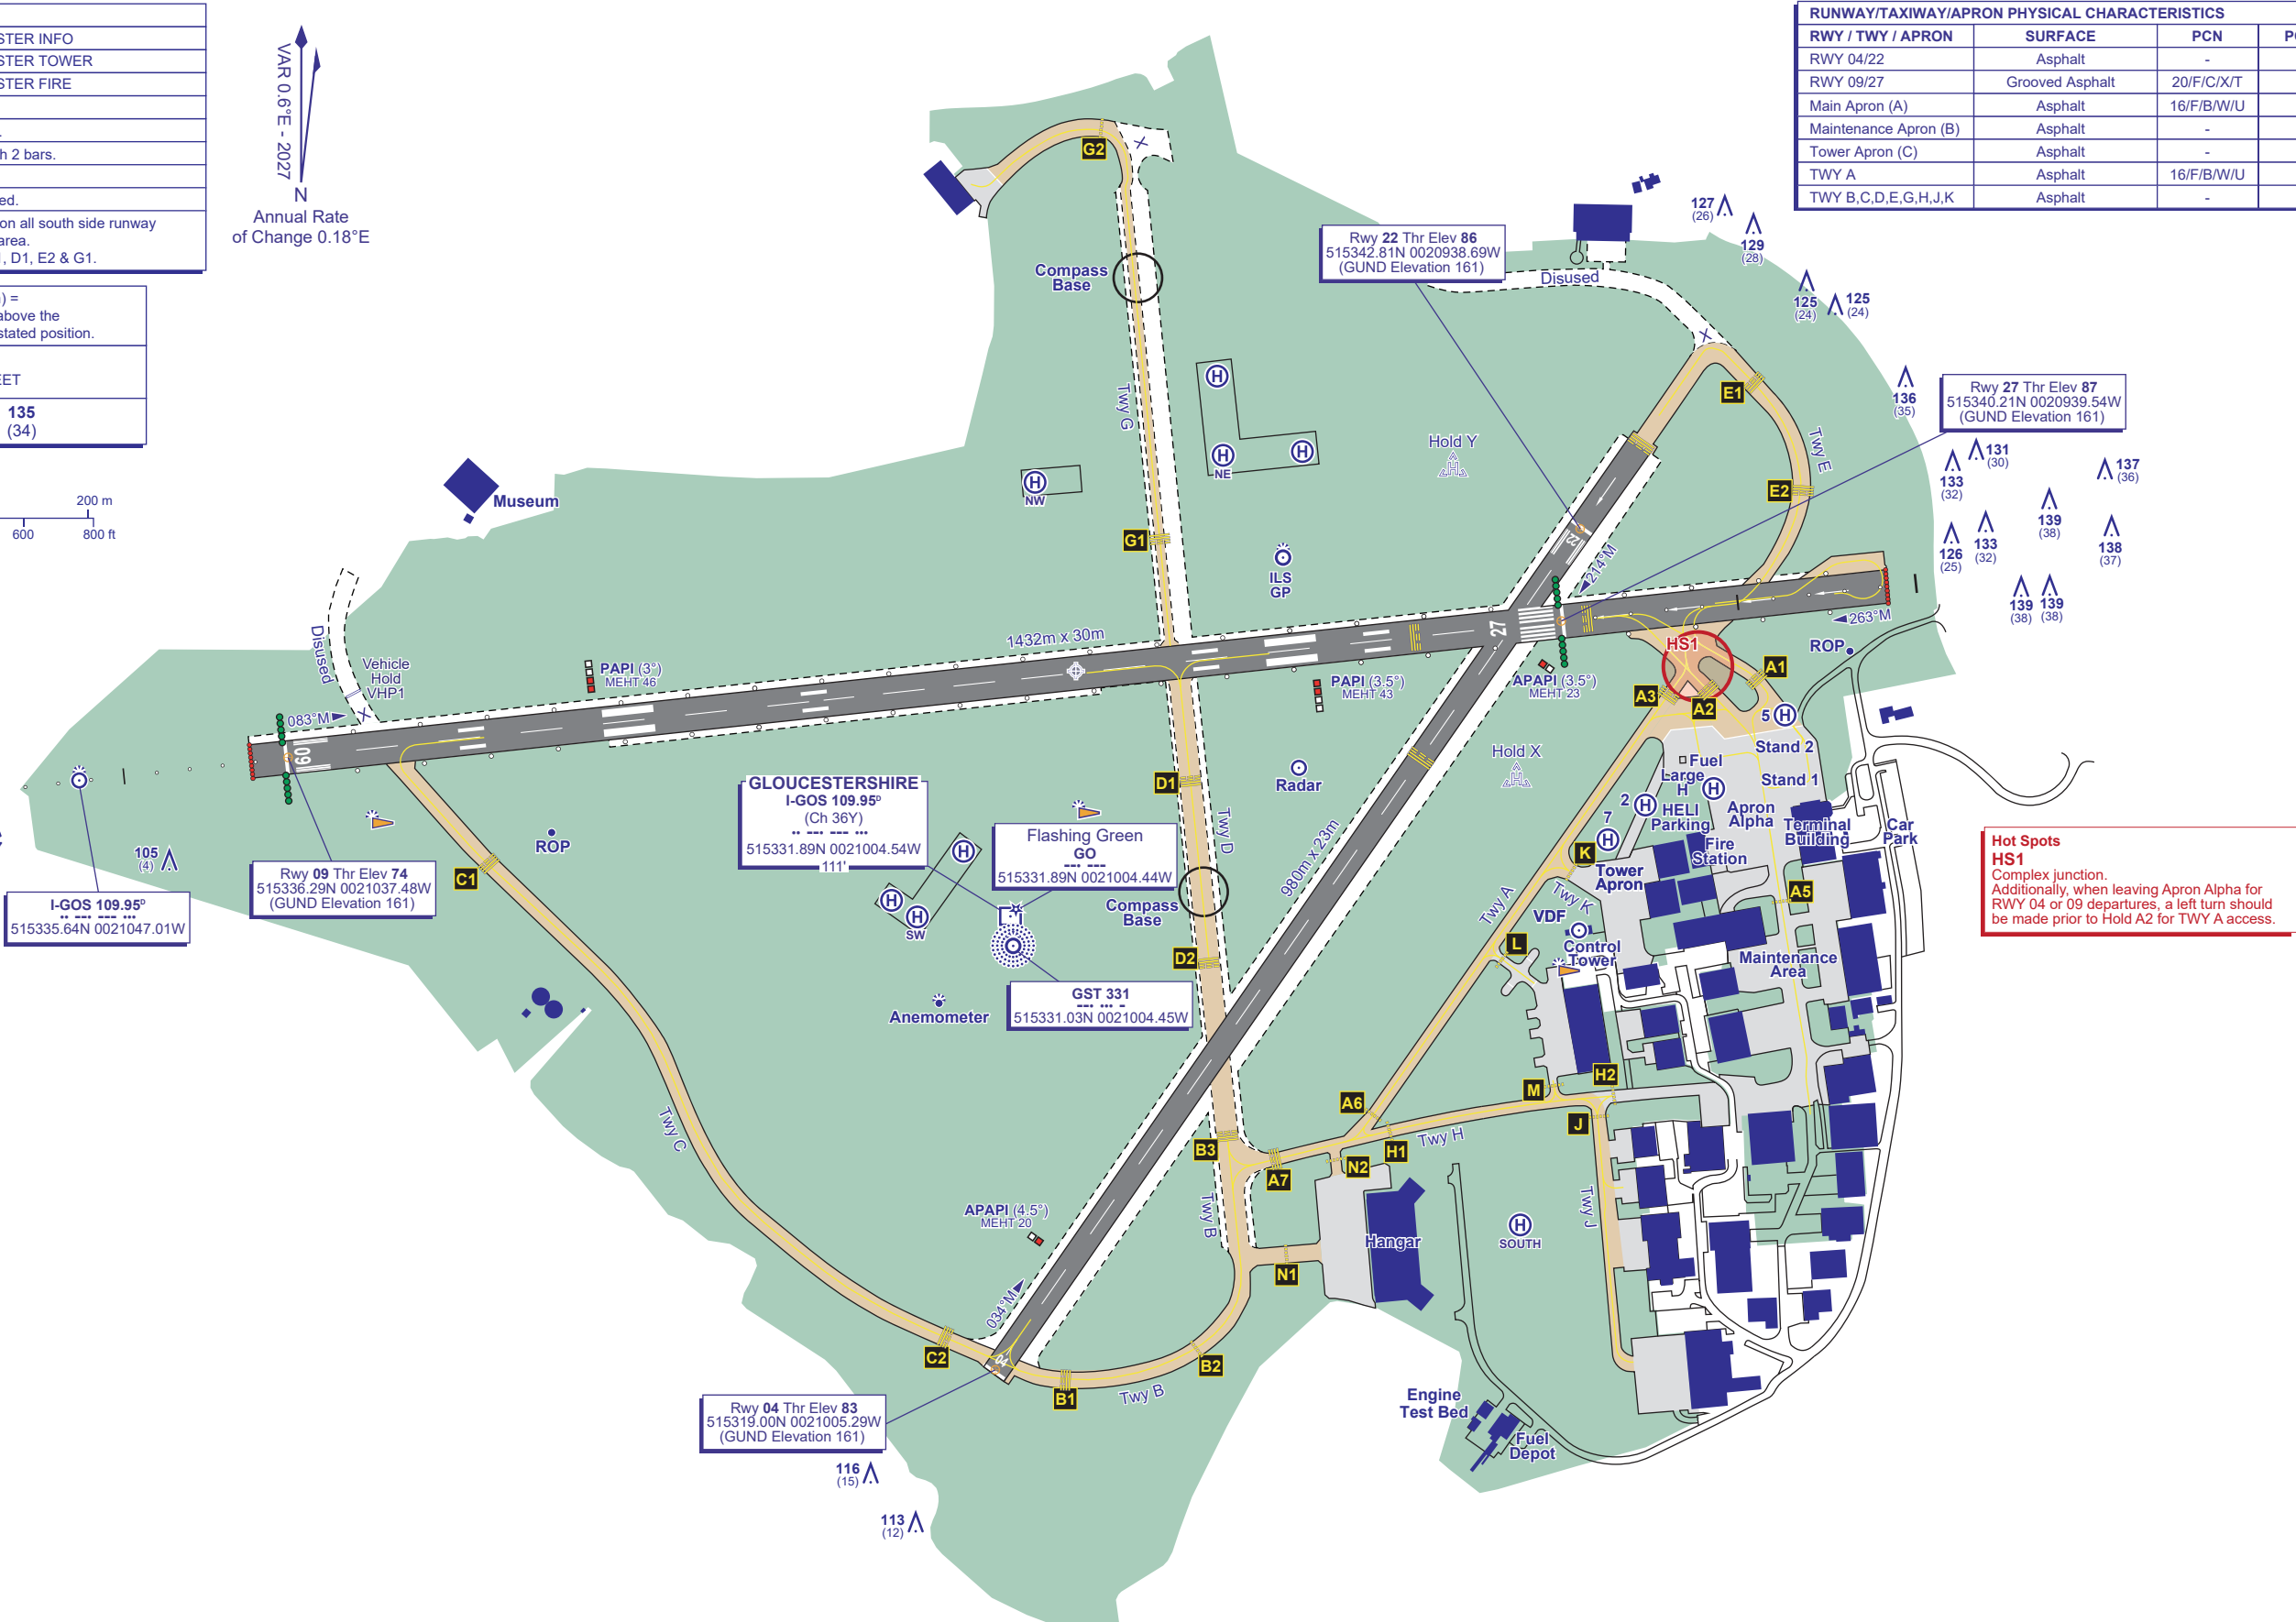

CHANGE (3/26): HOLDS H2 & N2. COMMS FIRE FREQUENCY. MAG INFO.