

GUND (Geoid Undulation) =  
The height of the Geoid (MSL) above the  
Reference Ellipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC  
ELEVATIONS AND HEIGHTS ARE IN FEET

ELEVATIONS IN FEET AMSL  
HEIGHTS IN FEET ABOVE AD

42  
(25)


01002003005001000

ft

01002003005001000

m

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS			
APRON / RWY / TWY	SURFACE	PCN	ELEVATION
RWY 27	Grooved Asphalt	30/F/C/Y/T	-
RWY 09	Grooved Asphalt	30/F/C/Y/T	-
Main Apron	Macadam	27/F/C/Y/T	-
Western Apron	Macadam	23/F/C/Y/T	-
TWY A	Macadam	23/F/C/Y/T	-
TWY B	Macadam	16/F/C/Y/T	-
TWY C	Macadam	-	-
TWY D & E	Macadam	12/F/C/Y/T	-

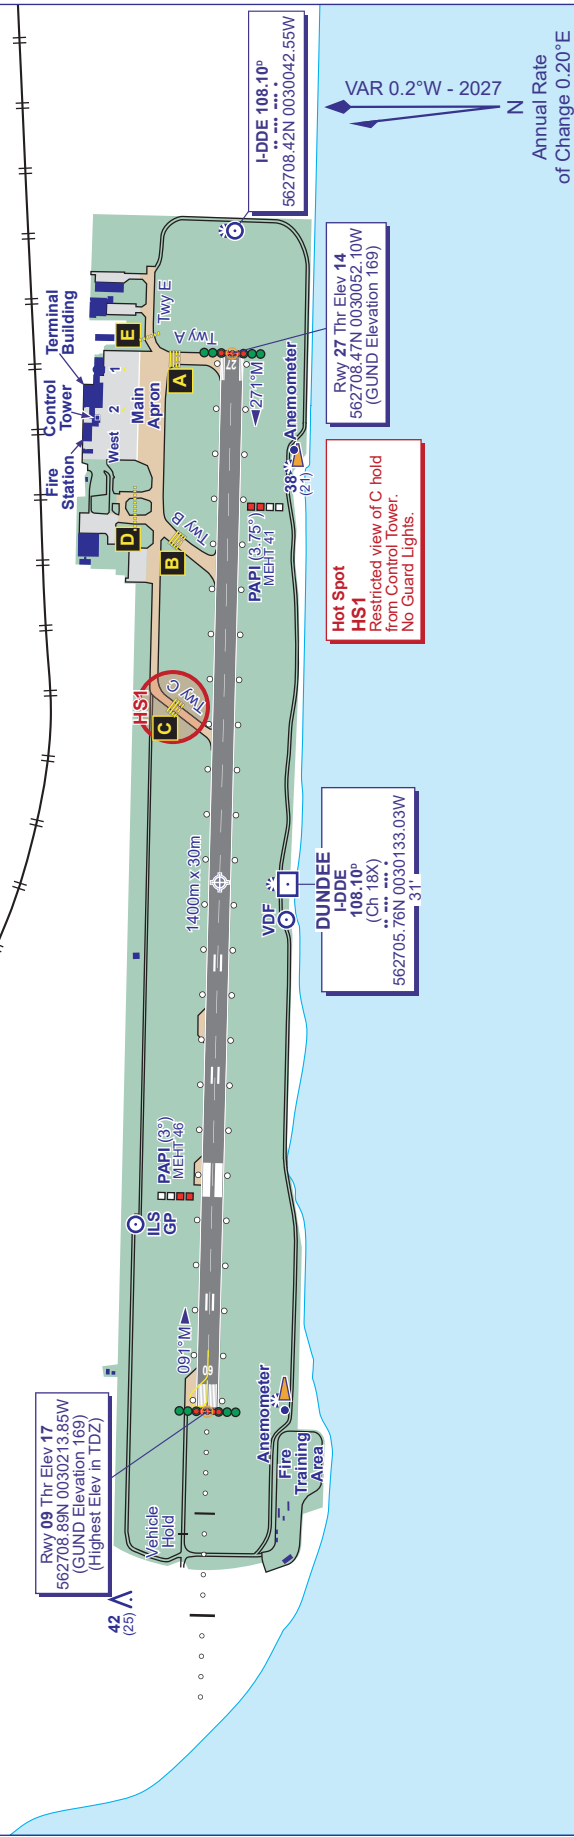

COM			
ATIS	119.330	DUNDEE INFORMATION	
TWR	122.905	DUNDEE TOWER	
	121.605	DUNDEE FIRE	
LIGHTING			
APCH 09	HI 375 m uni-d with 2 crossbars.		
THR 09	HI elevated green with HI elevated green W bars.		
THR 27	HI elevated green.		
RWY 09/27	HI elevated bi-d with LI omni-d component. White with end 360 m yellow caution zone. End lights elevated red.		
TWY	Blue edge on TWYs A, B, D & E. Guard Lights at holds A & B.		

CHANGE (4/26): DUNDEE FIRE FREQUENCY, MAG INFO REVISED. RWY HEADINGS.			
---	--	--	--