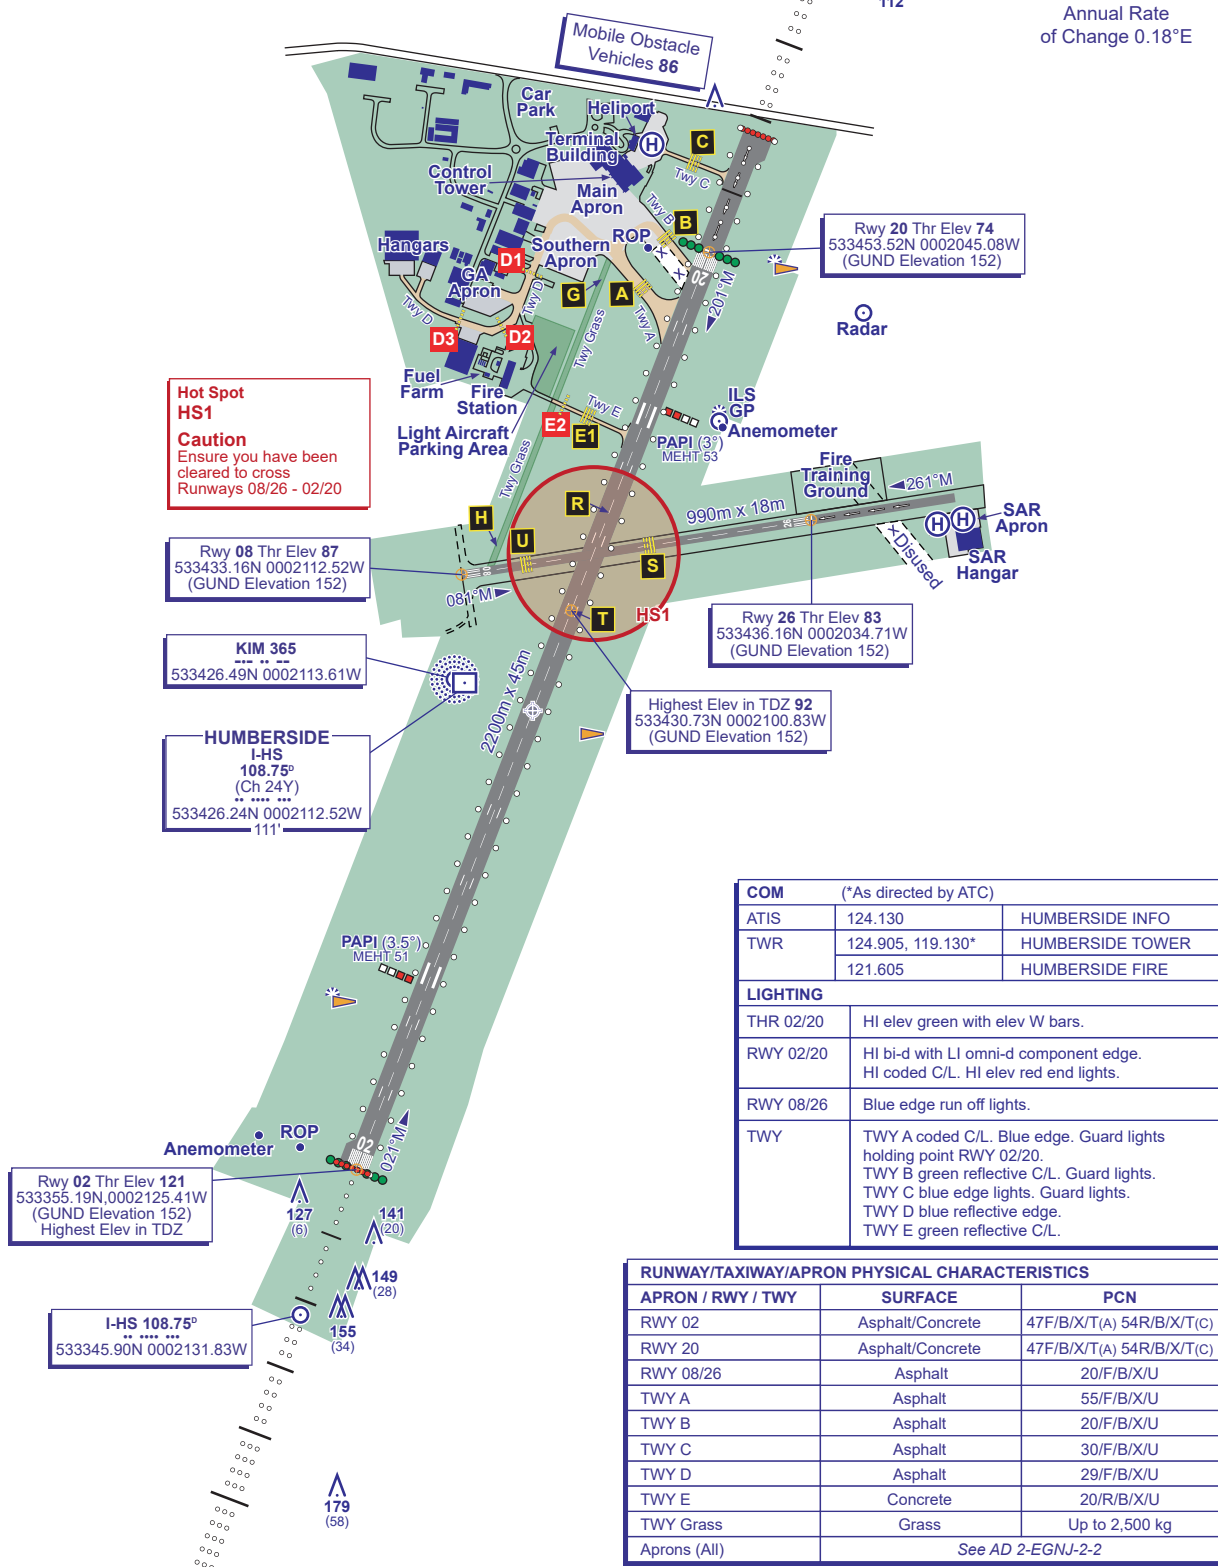


**GUND** (Geoid Undulation) =The height of the Geoid (MSL) above the  
Reference Ellipsoid (WGS 84) at the stated position.BEARINGS ARE MAGNETIC  
ELEVATIONS AND HEIGHTS ARE IN FEETELEVATIONS IN FEET AMSL  
HEIGHTS IN FEET ABOVE AD**179**  
(58)100 0 100 200 300 400 500 m  
500 0 500 1000 1500 ftVAR 1.1°E - 2027  
N  
Annual Rate  
of Change 0.18°E

COM	(*As directed by ATC)	
ATIS	124.130	HUMBERSIDE INFO
TWR	124.905, 119.130*	HUMBERSIDE TOWER
	121.605	HUMBERSIDE FIRE
<b>LIGHTING</b>		
THR 02/20	Hi elev green with elev W bars.	
RWY 02/20	Hi bi-d with LI omni-d component edge. Hi coded C/L. Hi elev red end lights.	
RWY 08/26	Blue edge run off lights.	
TWY	TWY A coded C/L. Blue edge. Guard lights holding point RWY 02/20. TWY B green reflective C/L. Guard lights. TWY C blue edge lights. Guard lights. TWY D blue reflective edge. TWY E green reflective C/L.	

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	SURFACE	PCN
RWY 02	Asphalt/Concrete	47F/B/X/T(A) 54R/B/X/T(C)
RWY 20	Asphalt/Concrete	47F/B/X/T(A) 54R/B/X/T(C)
RWY 08/26	Asphalt	20F/B/X/U
TWY A	Asphalt	55F/B/X/U
TWY B	Asphalt	20F/B/X/U
TWY C	Asphalt	30F/B/X/U
TWY D	Asphalt	29F/B/X/U
TWY E	Concrete	20R/B/X/U
TWY Grass	Grass	Up to 2,500 kg
Aprons (All)	See AD 2-EGNJ-2-2	

**CHANGE (4/26): HUMBERSIDE FIRE FREQUENCY.**