


COM		
ATIS	130.560	ST ATHAN INFORMATION
TWR	122.865 241.125	ST ATHAN TOWER
	121.600	ST ATHAN FIRE

**GUND** (Geoid Undulation) =  
The height of the Geoid (MSL) above the  
Reference Ellipsoid (WGS 84) at the stated position.

BEARINGS ARE MAGNETIC ELEVATIONS IN FEET AMSL HEIGHTS IN FEET ABOVE AD	<b>349</b> (185)
--	---------------------

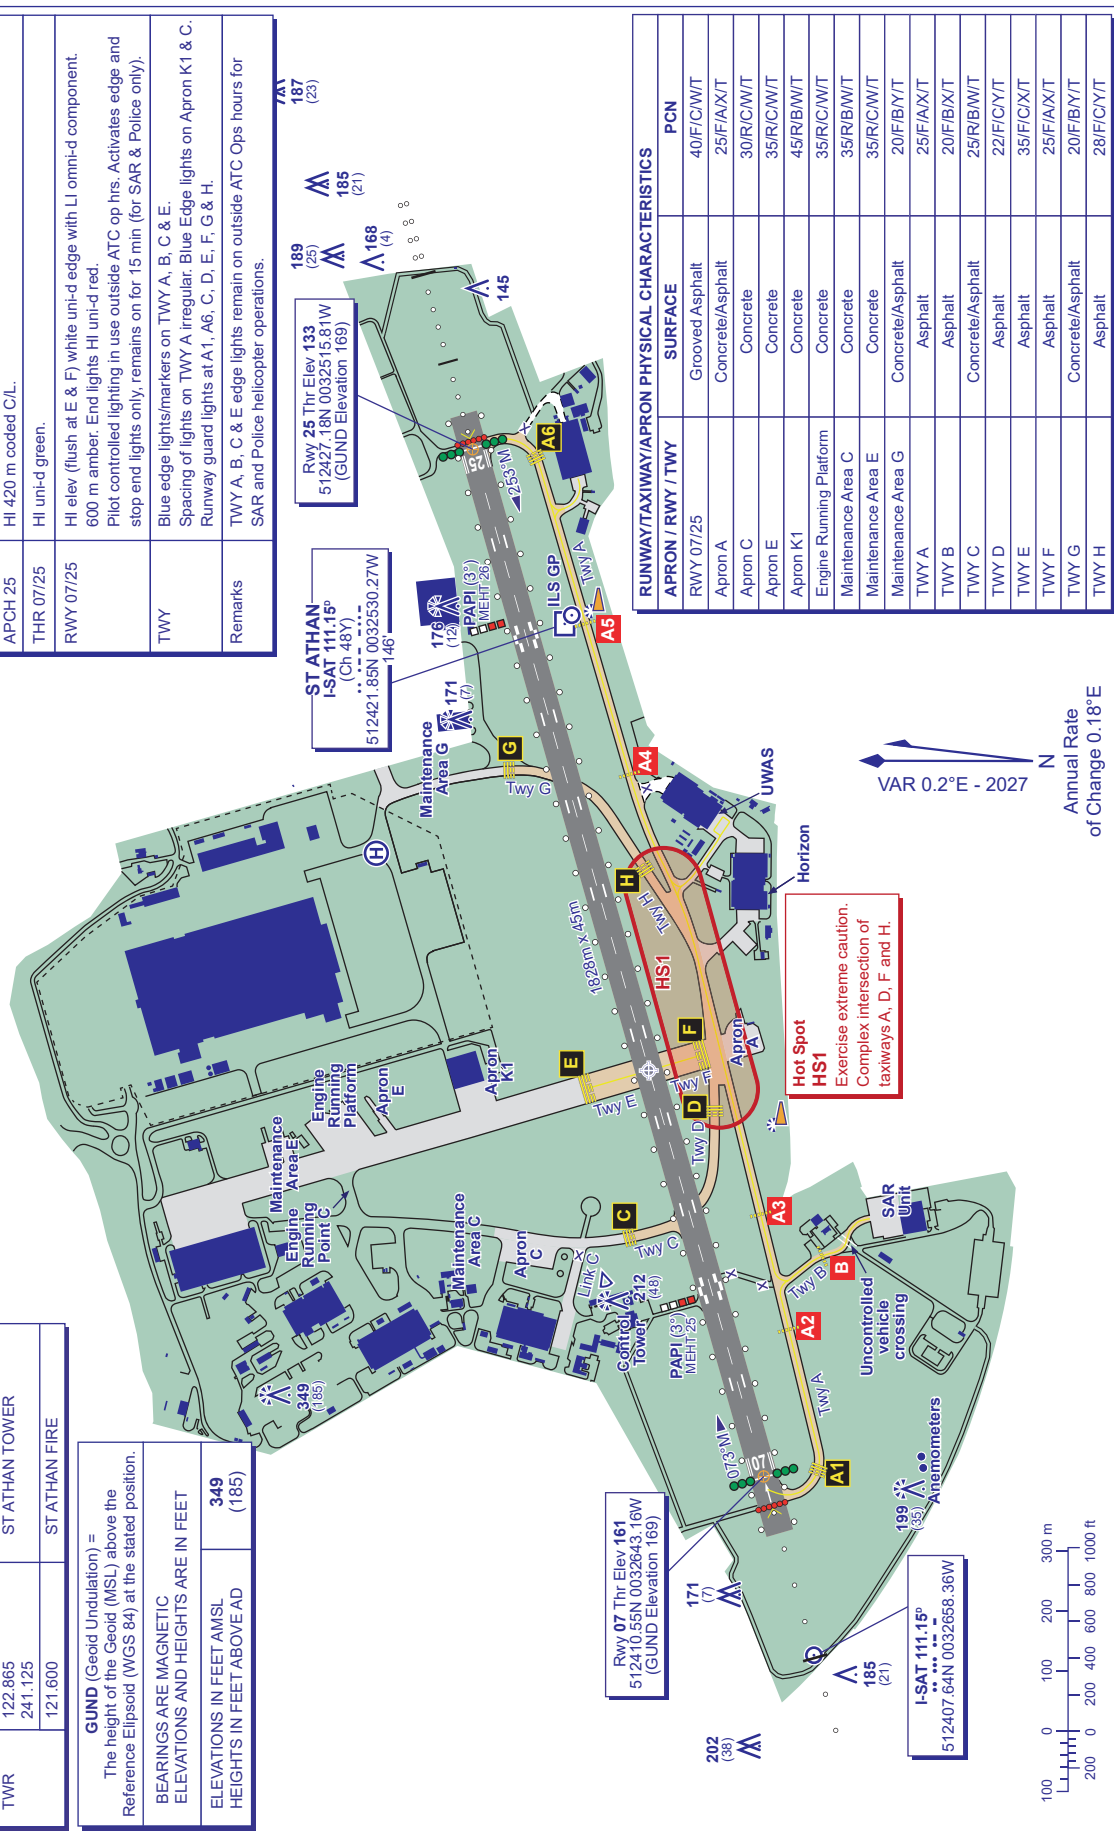

LIGHTING	
APCH 07	HL 430 m coded C/L.
APCH 25	HL 420 m coded C/L.
THR 07/25	HL uni-d green.
RWY 07/25	HL elev (flush at E & F) white uni-d edge with LI omni-d component. 600 m amber. End lights HL uni-d red. Pilot controlled lighting in use outside ATC op hrs. Activates edge and stop end lights only, remains on for 15 min (for SAR & Police only).
TWY	Blue edge lights/markers on TWY A, B, C & E. Spacing of lights on TWY A irregular. Blue Edge lights on Apron K1 & C. Runway guard lights at A1, A6, C, D, E, F, G & H.
Remarks	TWY A, B, C & E edge lights remain on outside ATC Ops hours for SAR and Police helicopter operations.

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	SURFACE	PCN
RWY 07/25	Grooved Asphalt	40/F/CW/T
Apron A	Concrete/Asphalt	25/F/AX/T
Apron C	Concrete	30/R/CW/T
Apron E	Concrete	35/R/CW/T
Apron K1	Concrete	45/R/BW/T
Engine Running Platform	Concrete	35/R/CW/T
Maintenance Area C	Concrete	35/R/BW/T
Maintenance Area E	Concrete	35/R/CW/T
Maintenance Area G	Concrete/Asphalt	20/F/BY/T
TWY A	Asphalt	25/F/AX/T
TWY B	Asphalt	20/F/BY/T
TWY C	Concrete/Asphalt	25/R/BW/T
TWY D	Asphalt	22/F/XY/T
TWY E	Asphalt	35/F/CX/T
TWY F	Asphalt	25/F/AX/T
TWY G	Concrete/Asphalt	20/F/BY/T
TWY H	Asphalt	28/F/XY/T