

⑥ Noise Monitoring Terminals (NMT)

Only Noise Monitoring Terminals used for Infringement/Rebate purposes are shown.


Distance to run to the appropriate NMT is in nautical miles from take-off position which gives maximum TORA.

RWY	NMT	NM
23R	1	3.4
	3	3.4
	2	3.8

RWY	NMT	NM
05L	7	3.4
	6	3.7

RWY	NMT	NM
23L	21	3.5
	22	3.5

RWY	NMT	NM
05R	26	3.5

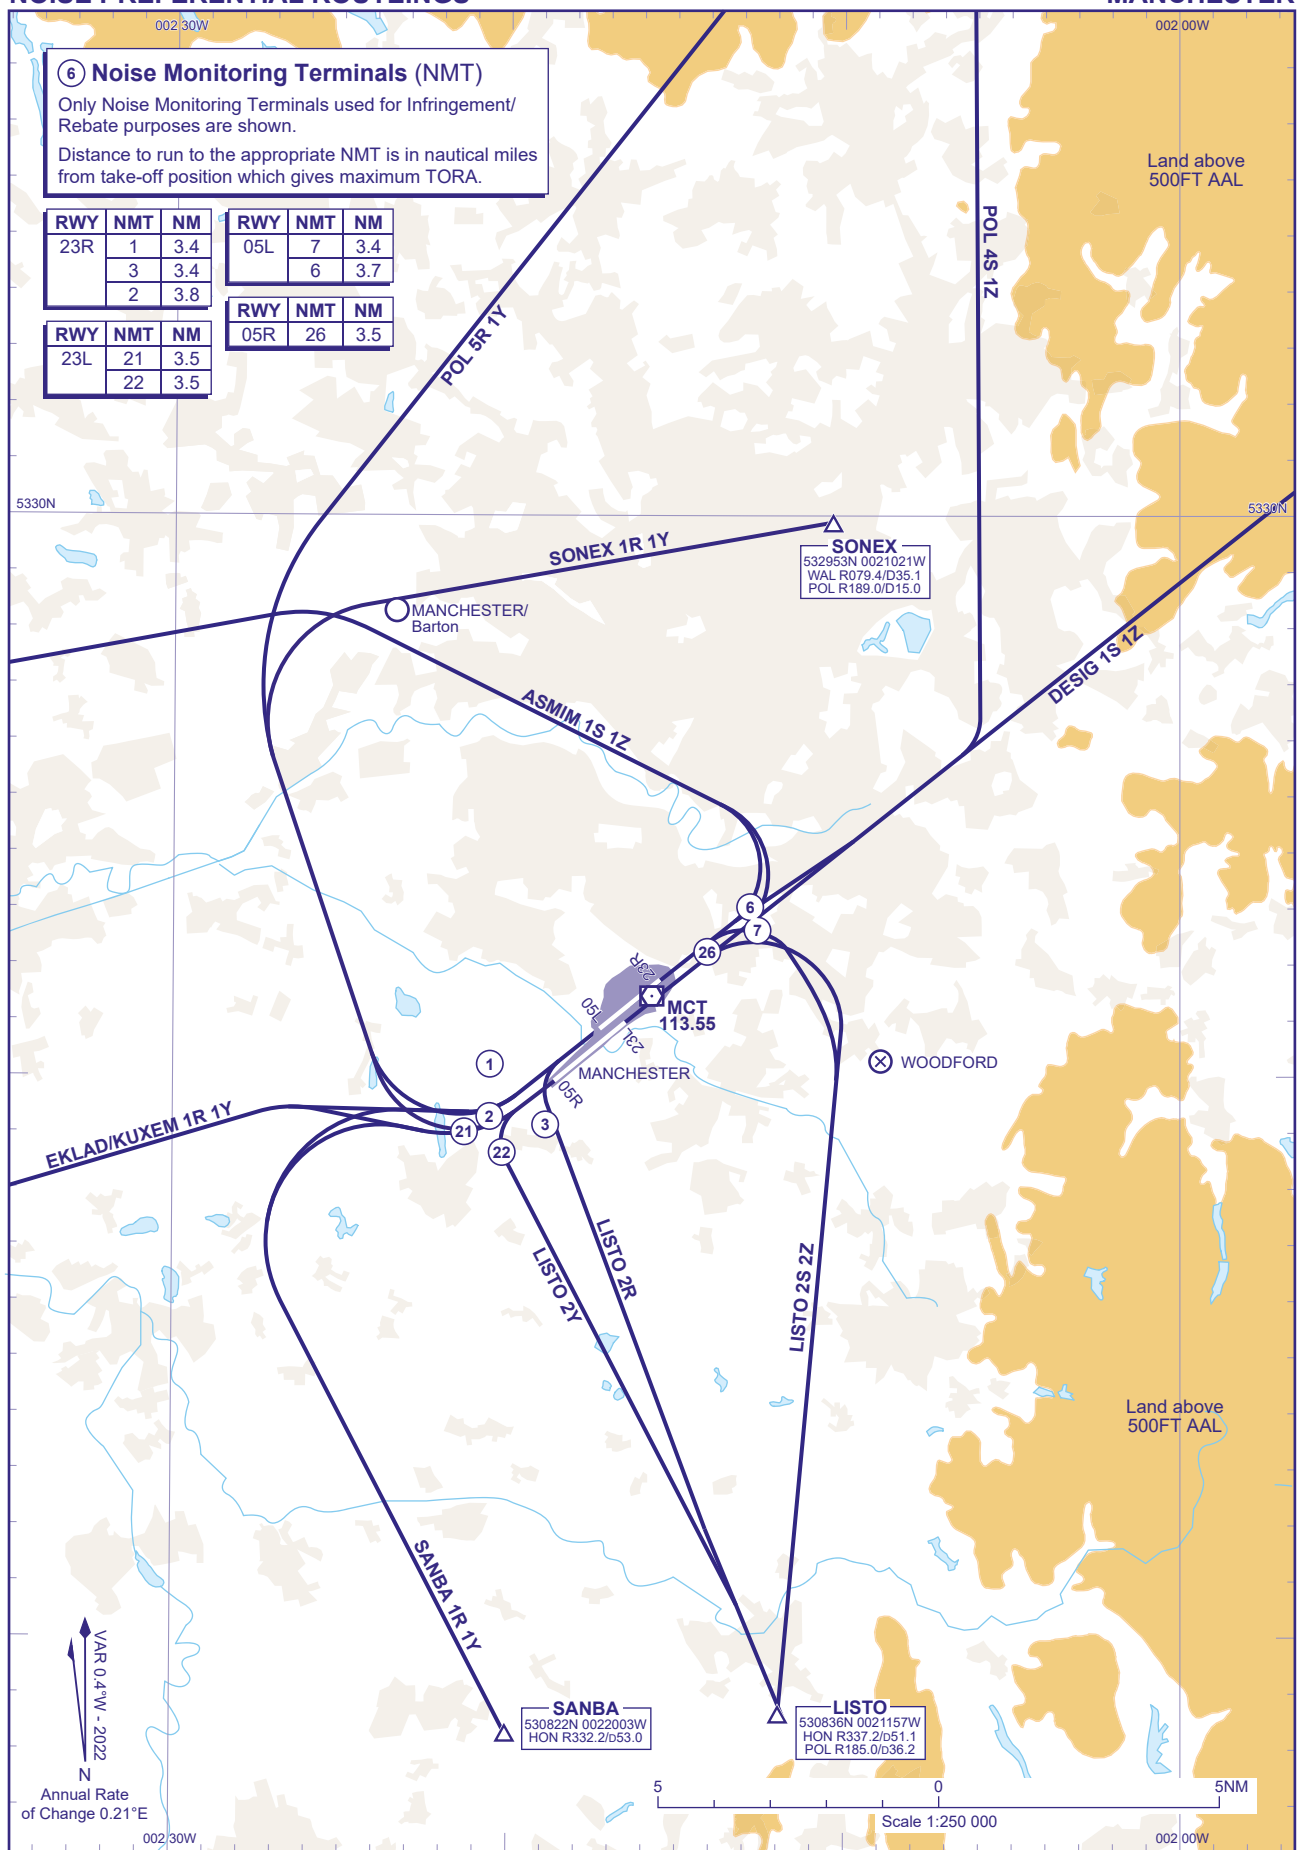

SONEX
532953N 0021021W
WAL R079.4/D35.1
POL R189.0/D15.0

MCT
113.55

SANBA
530822N 0022003W
HON R332.2/D53.0

LISTO
530836N 0021157W
HON R337.2/D51.1
POL R185.0/D36.2

VAR 0.4°W - 2022
Annual Rate of Change 0.21°E

Scale 1:250 000

CHANGE (2/24): POL VOR RECALIBRATED. RADIALS.